Magnetorquer Board (iMTQ)





DESCRIPTION

The ISIS MagneTorQuer board (iMTQ) is a PCB based 3-axis magnetic actuation and control system for Cubesats. It is designed as a standalone detumbling system and can also be used with more advanced ADCS hardware providing actuation of 0.2Am². In every axis, the system can be used to detumble cubesats up to a 12-unit sized system. The system can be placed in a cubesat electronics stack or in between stacks in ISIS cubesat structures. It can be controlled over digital or analog interface, and provides telemetry over I²C.

FEATURES

- Three axis magnetometer (onboard + interface for external MTM)
- Three actuators; two torque rods and one air core torquer.
- Current sensors for each torquers
- Temperature telemetry of actuators
- Including detumbling algorithm
- Suitable to detumble up to 12U (~24kg) CubeSats
- Can be used to desaturate reaction wheels




- Actuation level in all 3-axis
 Nominal: 0.2 Am2 (@ 20°C, 5V)
- Maximum actuation envelope error: <5%
- Magnetometer accuracy: <3µT
- Detumbling algorithm frequency: selectable from 1Hz to 8Hz





PRODUCT PROPERTIES

- Mass: 196g
- Qualified operational temperature range: -40°C to +70°C
- Dimensions (I x w x h): 95.9 x 90.1 x 17 mm³
- Supply voltage: 5V
- Power consumption (@ 20°C)
 - → No actuation: 175 mW
 - → Full actuation (3-Axis): <1.2W

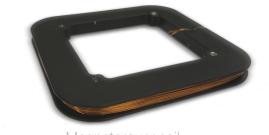

Magnetorquer coil

CONFIGURATION AND OPTIONS

- External magnetometer
- I²C control level command, with automatic current sensing and temperature correction
- Direct analog control of actuators with direct PWM signal
- CSKB connector type and location




ISIS Magnetorquer Board

OUALIFICATION AND ACCEPTANCE TESTING

Test	QT	AT
Functional	\checkmark	\checkmark
Vibration	\checkmark	-
Mechanical Shock	\checkmark	-
Thermal Cycling	\checkmark	\checkmark
Thermal Vacuum	\checkmark	-

^{*}QT is performed on the design/qualification model

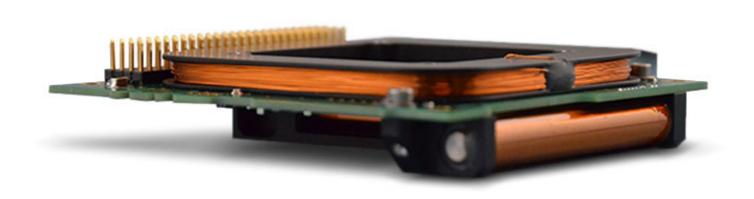

This document is subject to change without notice. Latest information is on www.isispace.nl





^{*}AT is performed on the unit to be shipped